


A gorgeous space created with nature



It has united the toughness of ceramic tiles with modern technological advances and customer aspiration to produce a range that is vast in choice. With over a decade experience in this field and in depth knowledge of markets both in India and abroad, the promoters have set up a world class integrated production facility to manufacture and supply high quality ceramic tiles. The designs, size, colours and surface finishes will be made keeping in mind the needs of the Indian as well as overseas consumers. Over the years, the company has built a solid customer base and a reputation both for itself and its product. Trust, quality and reliability have been the watchwords of the company plan to continue fulfilling the expectation of their vast array of customers. Total customer satisfaction via adoption of Quality Management Systems in all spheres of activity guarantee adherence to pre-decided standards. The company nurtures each relationship be it with the trade, consumers or suppliers. This has established as a reliable and trust worthy entity capable of overcoming market challenges.


12 MM THICKNESS

An elegant style for your taste

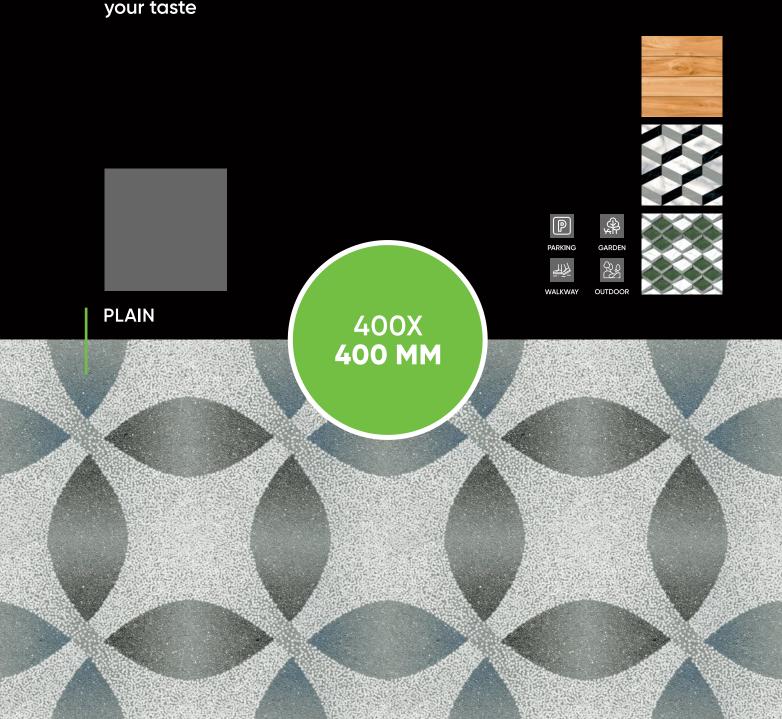


400X400 MM

12 MM THICKNESS







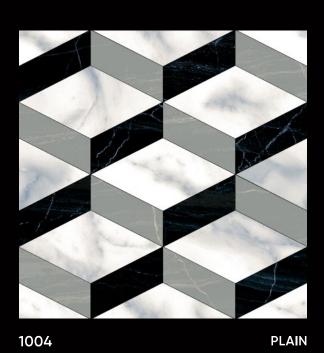

12 MM THICKNESS












12 MM THICKNESS











12 MM THICKNESS

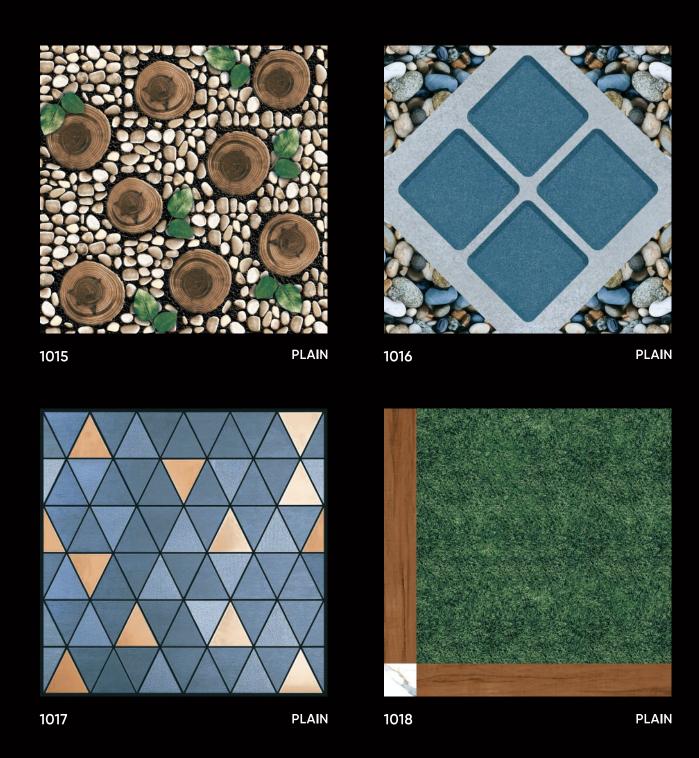


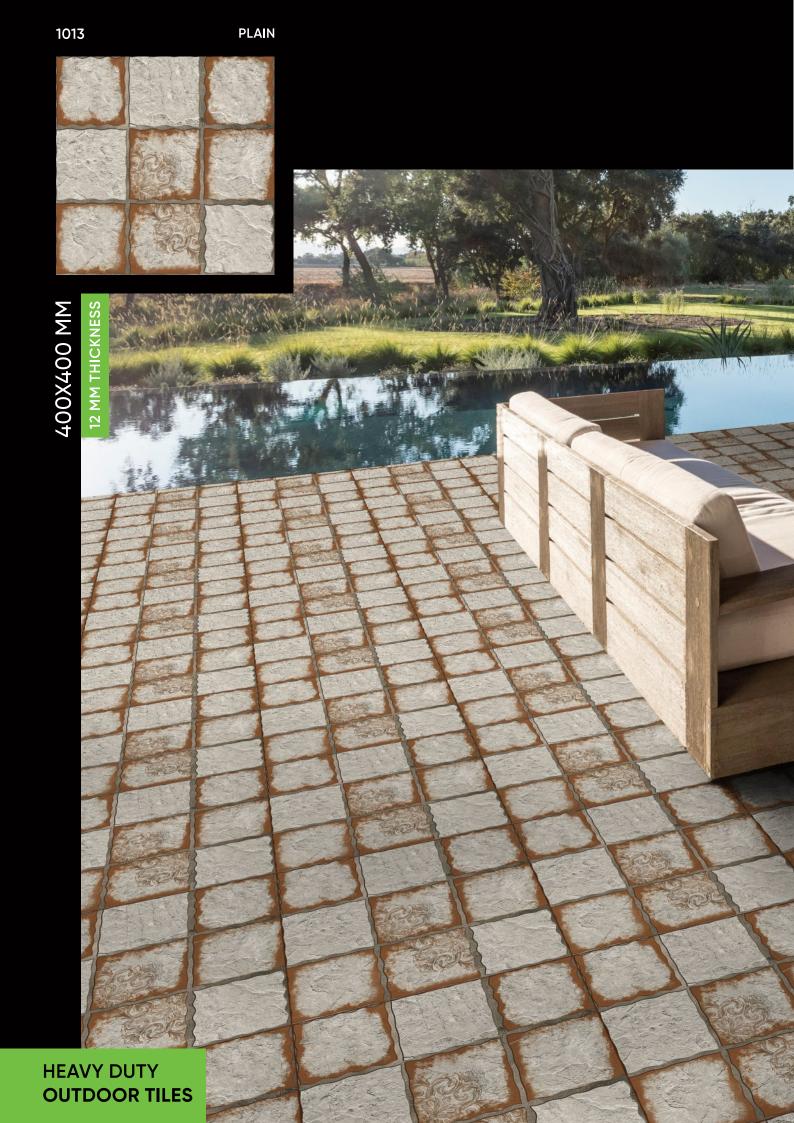

400X400 MM

12 MM THICKNESS








1020 PLAIN




1021 PLAIN




1022 PLAIN

12 MM THICKNESS














400X400 MM

12 MM THICKNESS








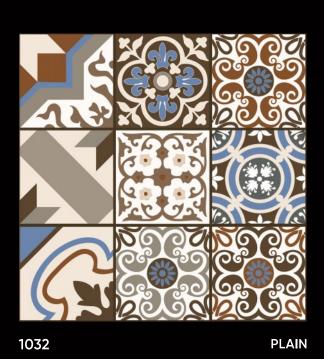




12 MM THICKNESS





1033 PLAIN






PLAIN 1036 PLAIN

12 MM THICKNESS






1037 PLAIN







1041 PLAIN

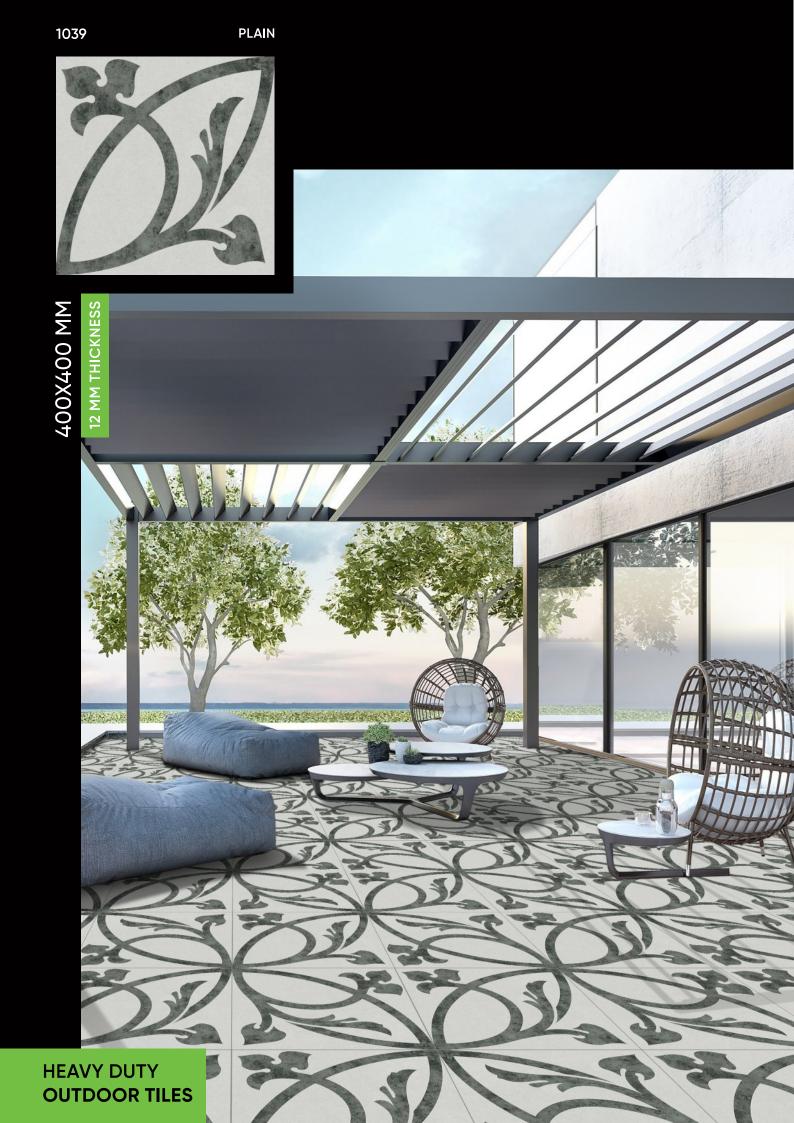

400X400 MM

12 MM THICKNESS










12 MM THICKNESS






1046 PLAIN









1049 PLAIN 1050 PLAIN

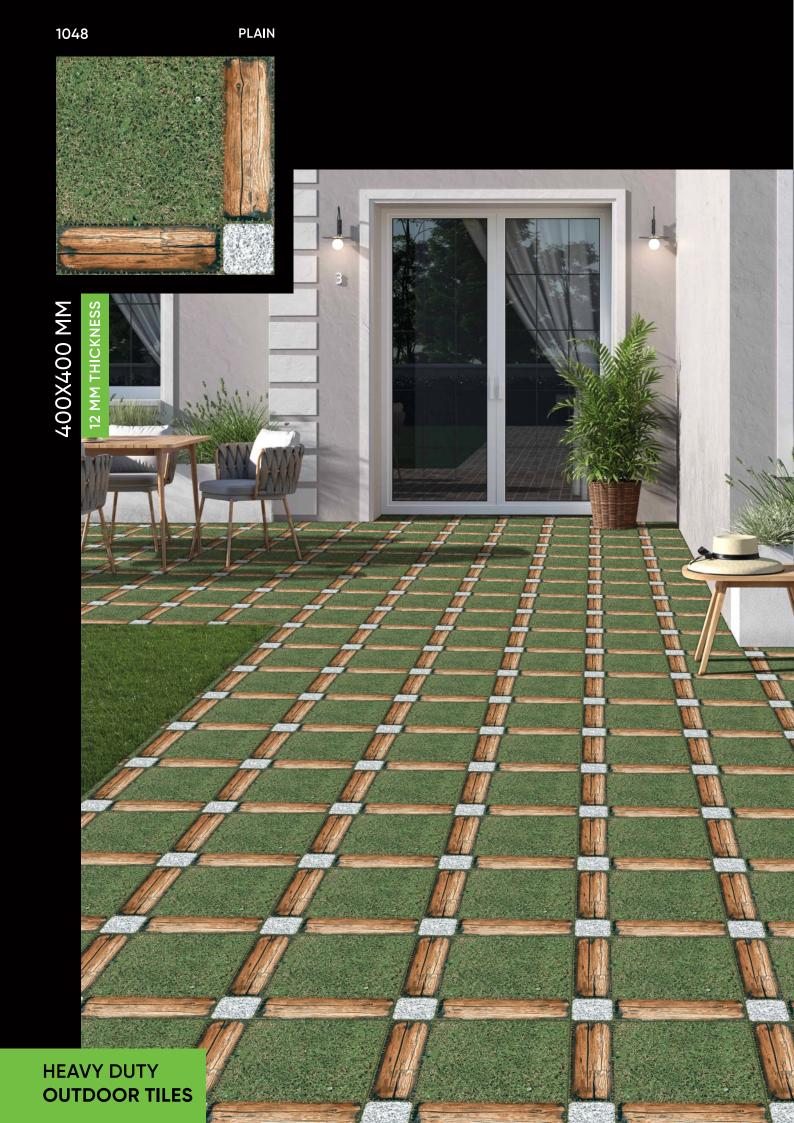



12 MM THICKNESS









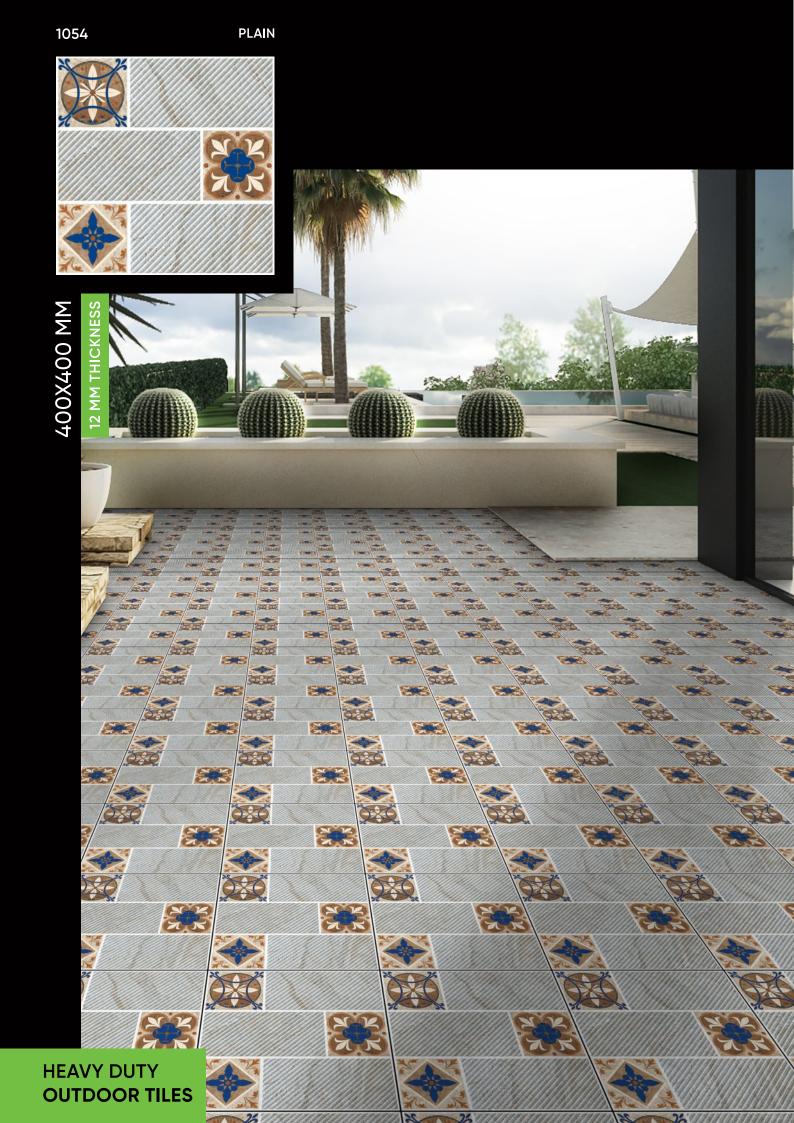



400X400 MM

12 MM THICKNESS










12 MM THICKNESS











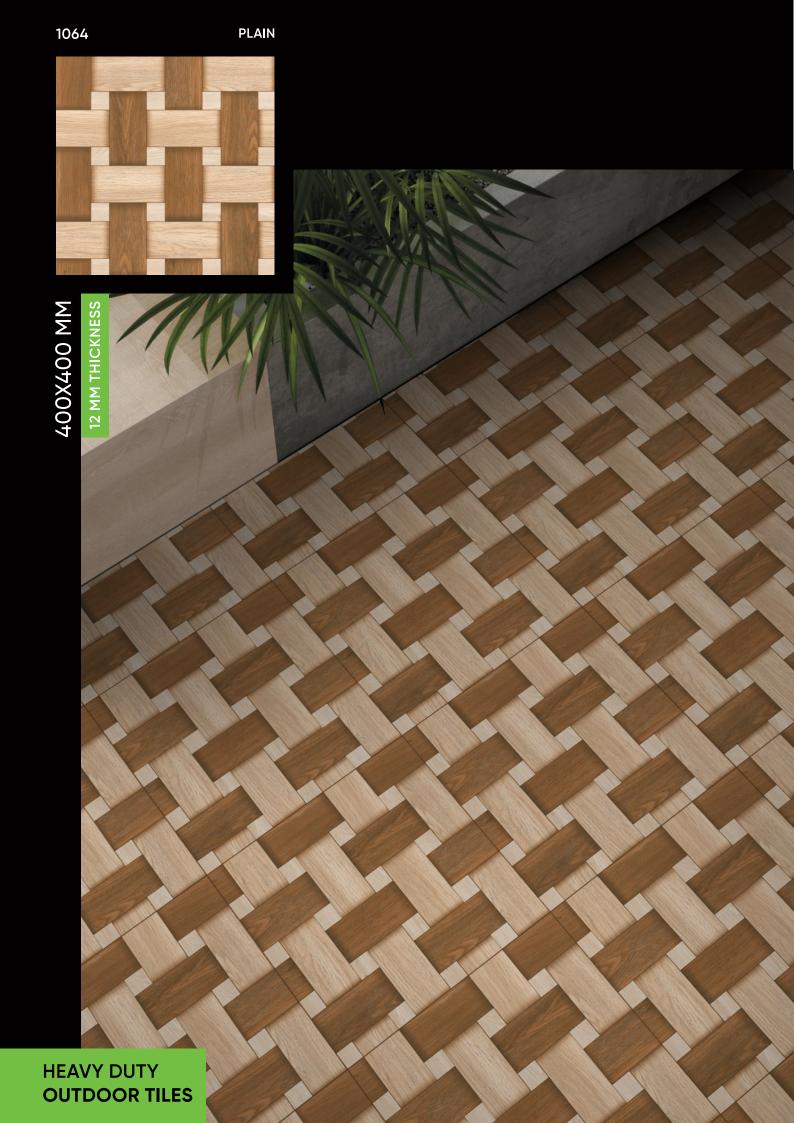


12 MM THICKNESS









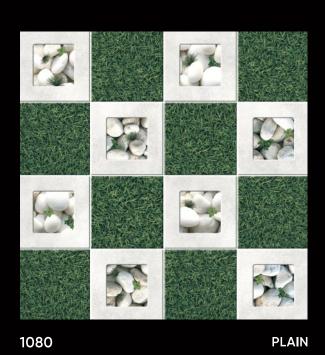


12 MM THICKNESS










12 MM THICKNESS









1086 PLAIN









1088 PLAIN

12 MM THICKNESS





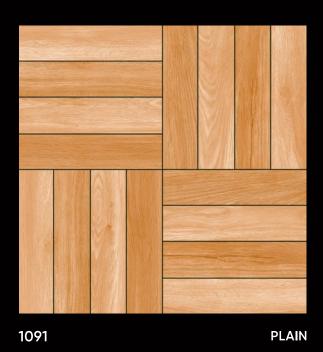




400X400 MM

12 MM THICKNESS










12 MM THICKNESS









1099 PLAIN

12 MM THICKNESS








1101 PLAIN









1103 PLAIN

12 MM THICKNESS








MARBLE SERIES

12 MM THICKNESS

An
elegant
style for
your taste

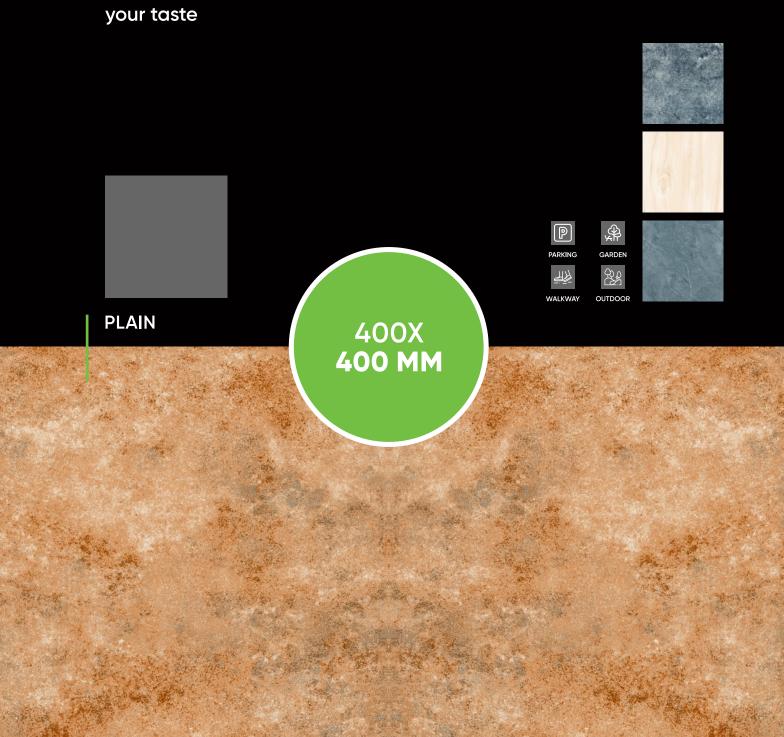

MARBLE SERIES 400X400 MM

12 MM THICKNESS




HEAVY DUTY OUTDOOR TILES

1201- DK


12 MM THICKNESS








1204- DK PLAIN



1205- LT PLAIN



1205- DK PLAIN

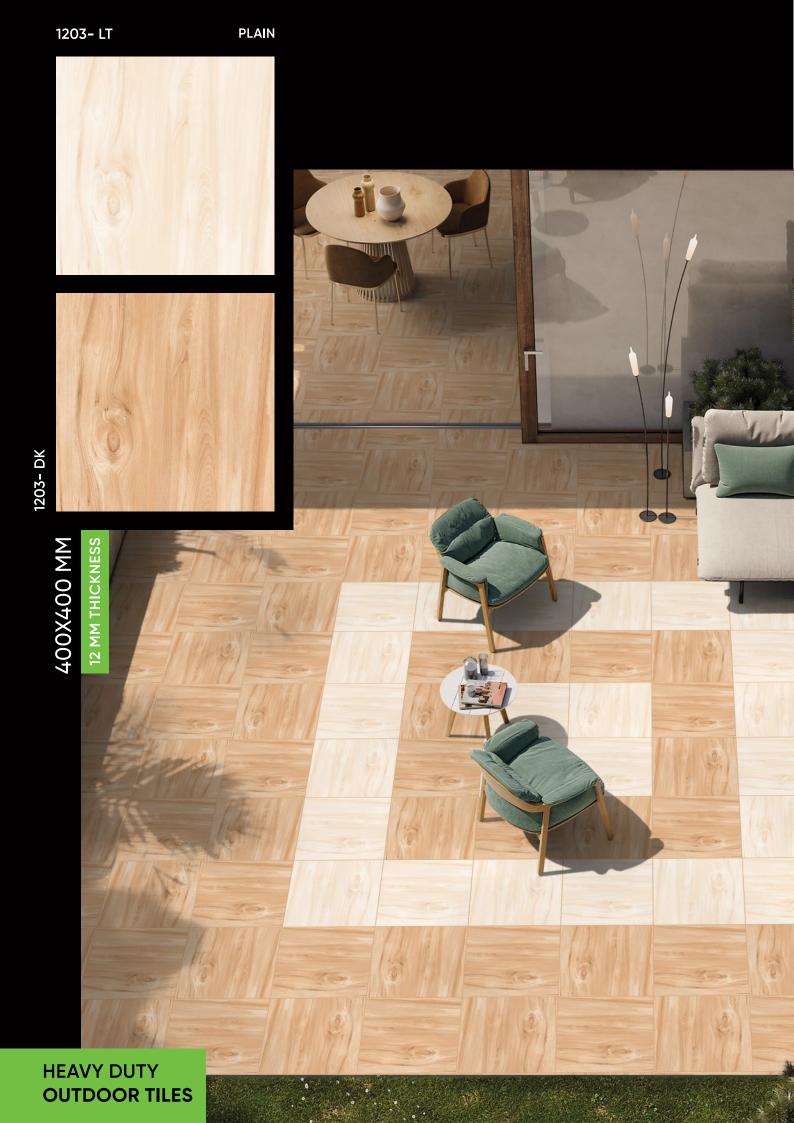

12 MM THICKNESS






1207- DK PLAIN




1209- LT PLAIN




1209- DK PLAIN

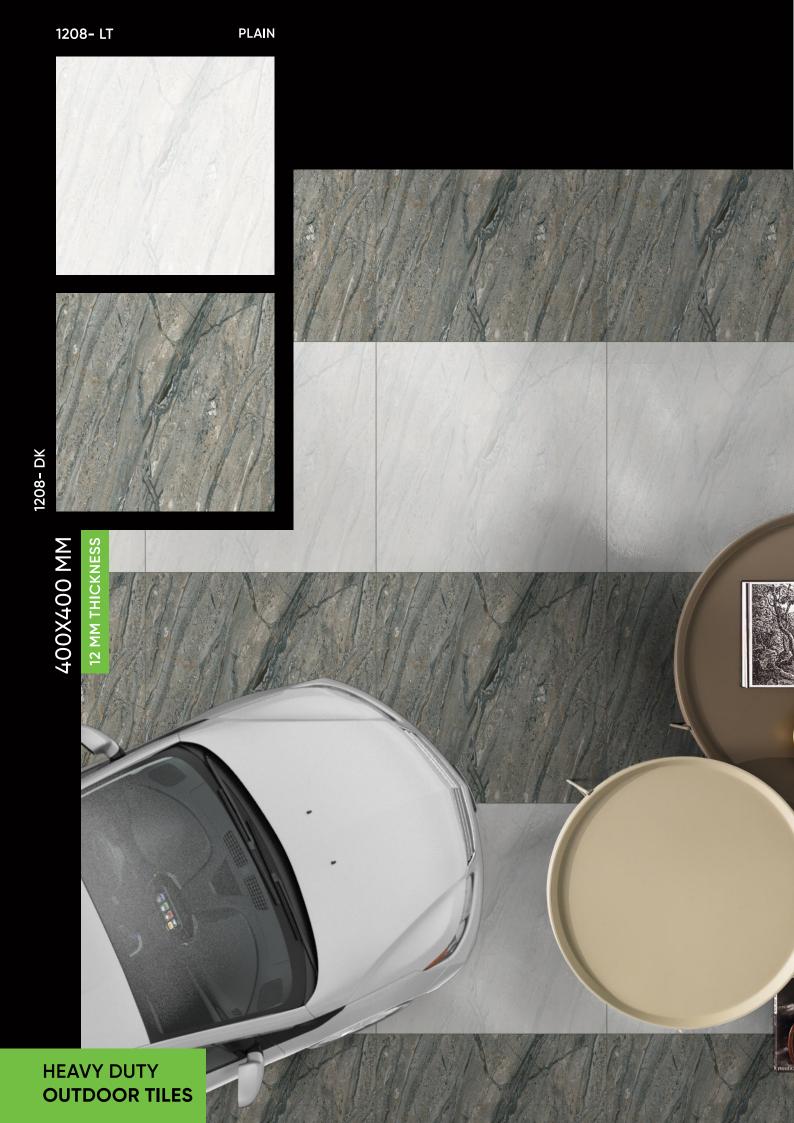

12 MM THICKNESS







1212- DK PLAIN





1213- LT PLAIN



1213- DK PLAIN

12 MM THICKNESS







1214- DK PLAIN



1216- LT PLAIN




1216- DK PLAIN



12 MM THICKNESS








PLAIN 1217- DK




PLAIN 1218- LT




PLAIN 1218- DK



12 MM THICKNESS









1221- LT PLAIN








1221- DK PLAIN

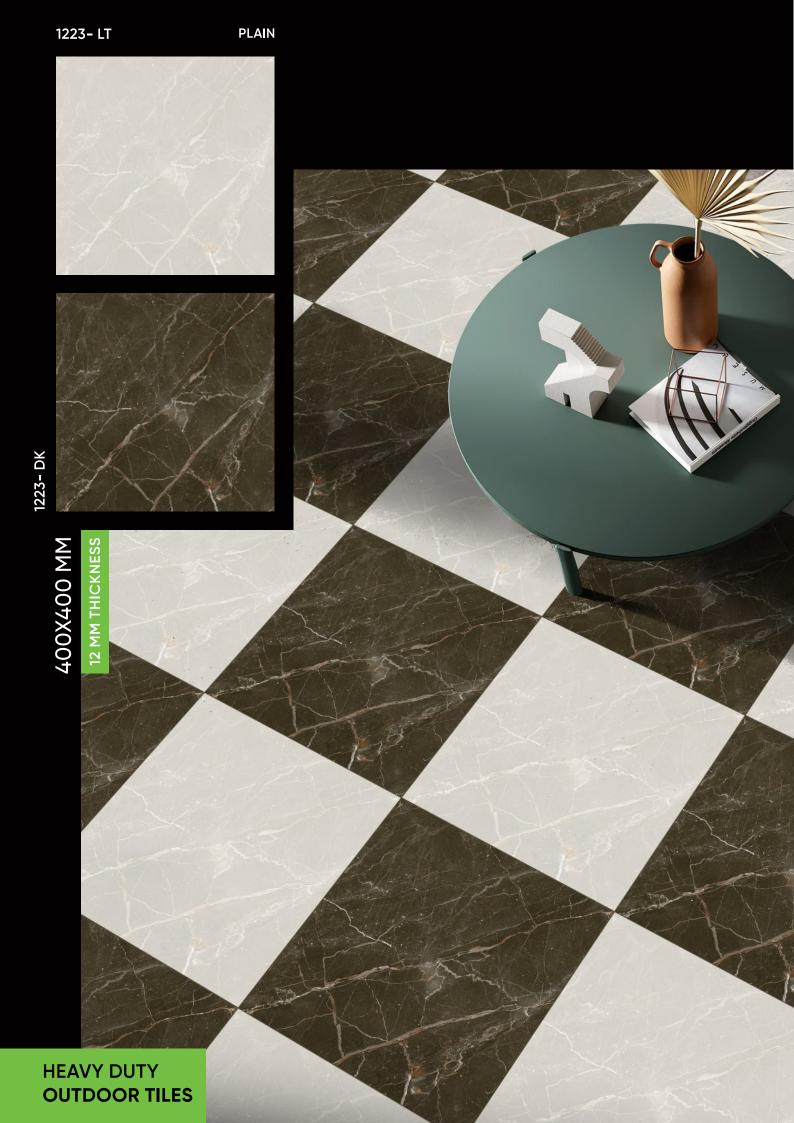

12 MM THICKNESS








1224- DK PLAIN



1225- LT PLAIN



1225- DK PLAIN

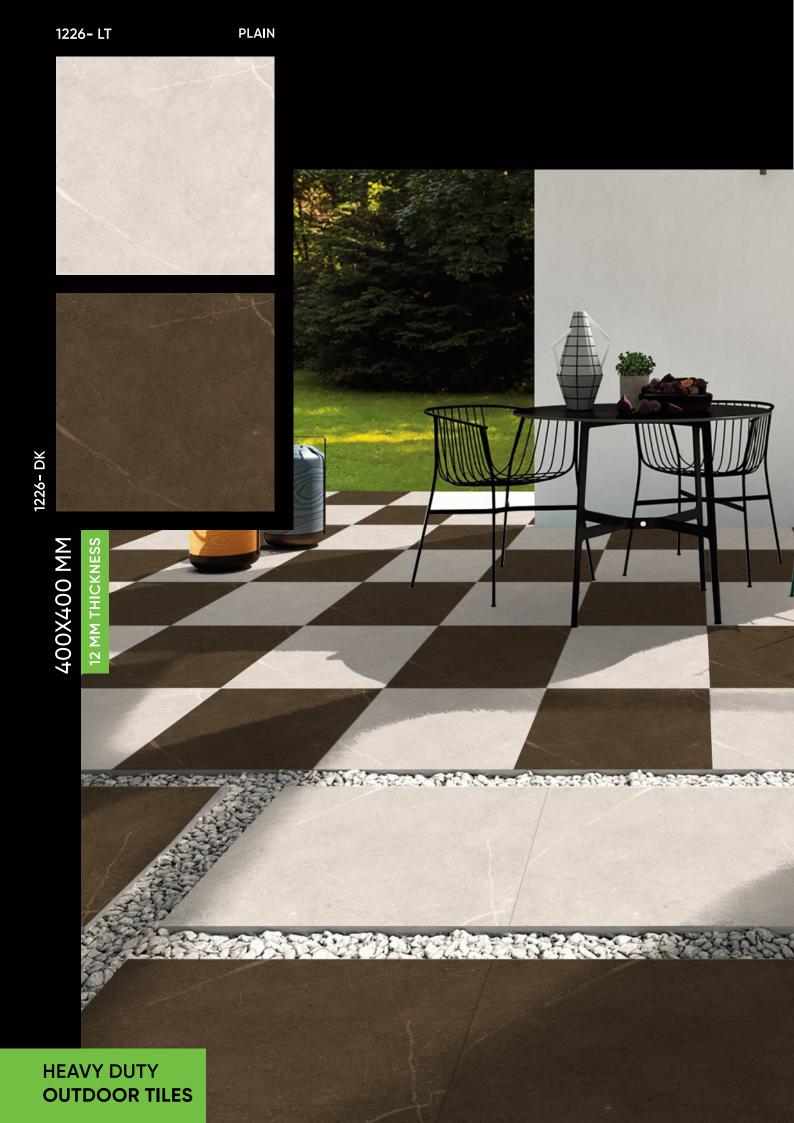


12 MM THICKNESS



1227- LT PLAIN




1227- DK PLAIN

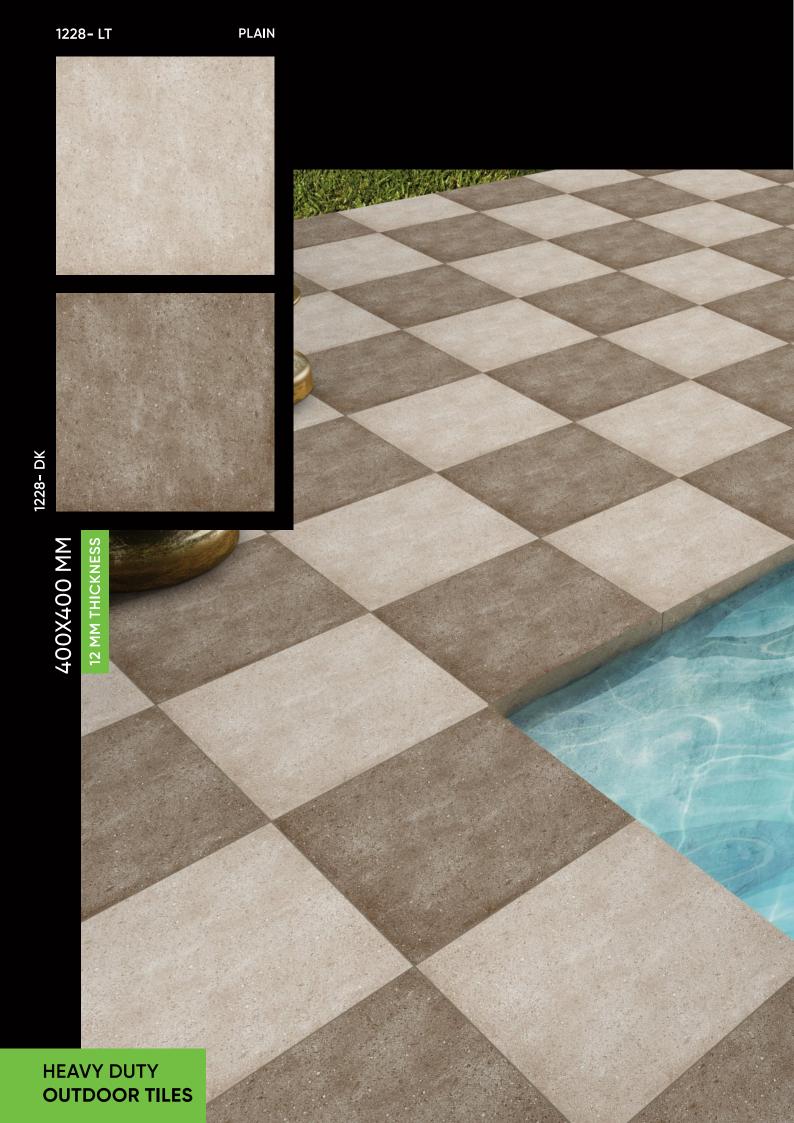

12 MM THICKNESS







1230- LT PLAIN




1229 - DK PLAIN



1230- DK PLAIN

12 MM THICKNESS

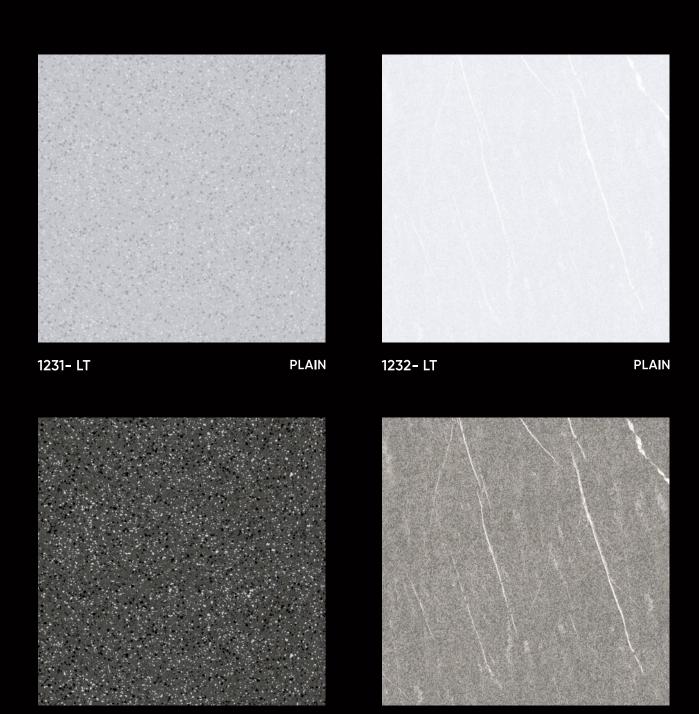

PLAIN

1232- DK


PLAIN

HEAVY DUTY OUTDOOR TILES

1231- DK

12 MM THICKNESS







1404- R PLAIN




1407- R PLAIN



1408- R PLAIN

12 MM THICKNESS







PLAIN 1413- R



PLAIN 1412- R




PLAIN 1415- R



12 MM THICKNESS







1418- R PLAIN



1419- R PLAIN

TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD				
REGULATORY PROPERTIES								
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2				
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2				
Color dierence	Unaltered	No change	No change	ISO-10545-16				
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER				
STRUCTURAL PROPERTIES								
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3				
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082				
MASSIVE MECHANICAL PROPERTIES								
	Min. 35 N/mm	Min. 40 N/mm²	Min. 40 N/mm²	ISO-10545-4				
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4				
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5				
SURFACE MECHANICAL PROPERTIES								
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7				
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101				
THERMO HYDROMETRIC PROPERTIES								
Frost resistance	No damage	No damage	No damage	ISO-10545-12				
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9				
Moisture expansion	Nil	Nil	Nil	ISO-10545-10				
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8				
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11				
CHEMICAL PROPERTIES								
Chemical resistance	No damage	No damage	No damage	ISO-10545-13				
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14				
SAFETY PROPERTIES								
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17				
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.				
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15				

Packing Details

SR. NO.	SIZE (IN MM)	PACKING	COVERAGE AREA	Thickness	WEIGHT
1	400X400MM	5 PIS	0.80SQ.MTR./8.61 SQ.FT.	12MM	19 Kg Approx

Note: •Colour Shown are as accurate as the limitations of the printing process will allow. • Prospective customers are advised to inspect a sample of the tile before ordering. • Every effort has been made to ensure the accuracy of the information given. • However, the company reserve the right to change the specifications without prior notice. • Sometime variations in shade or size being inherent to ceramic industry may occur. • Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

Applications

























DISCLAIMER: We reserves the right to delete & amend either totally of partially, and of the colours, shapes, size, references and other technical specification contain in catalogue at any time, the colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample final selection. The details of colours, size, references should be vitrified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE SHALL ENTERTAINED ON TILES ALREADY LAID/FIXED.

