


A gorgeous space created with nature



It has united the toughness of ceramic tiles with modern technological advances and customer aspiration to produce a range that is vast in choice. With over a decade experience in this field and in depth knowledge of markets both in India and abroad, the promoters have set up a world class integrated production facility to manufacture and supply high quality ceramic tiles. The designs, size, colours and surface finishes will be made keeping in mind the needs of the Indian as well as overseas consumers. Over the years, the company has built a solid customer base and a reputation both for itself and its product. Trust, quality and reliability have been the watchwords of the company plan to continue fulfilling the expectation of their vast array of customers. Total customer satisfaction via adoption of Quality Management Systems in all spheres of activity guarantee adherence to pre-decided standards. The company nurtures each relationship be it with the trade, consumers or suppliers. This has established as a reliable and trust worthy entity capable of overcoming market challenges.


12 MM THICKNESS


An elegant style for your taste

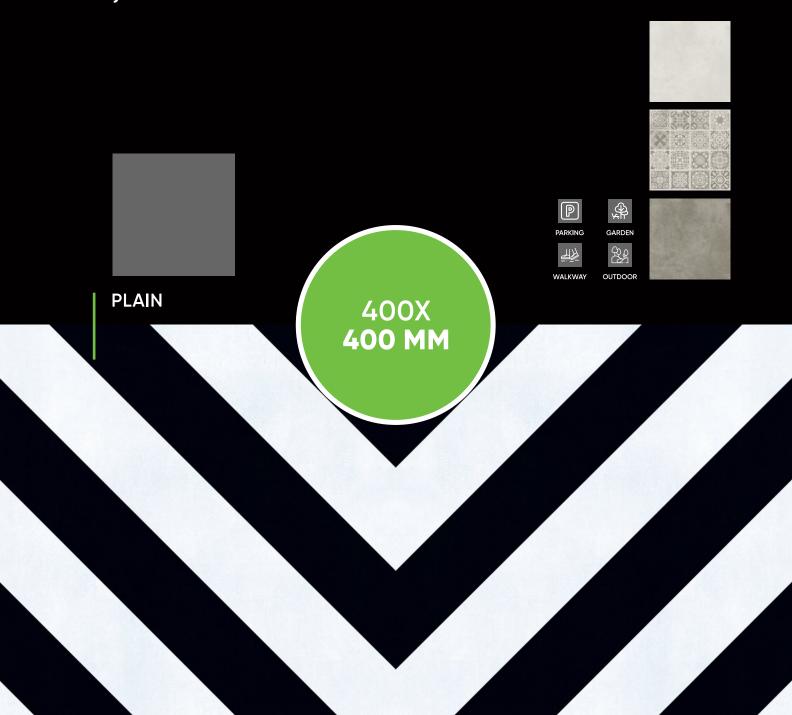

400X400 MM

12 MM THICKNESS








PLAIN MC-001- HL




MC-001- DK

MOROCON SERIES 400X400 MM

12 MM THICKNESS







MC-002- HL PLAIN




MC-002- DK


PLAIN

400X400 MM

12 MM THICKNESS








MC-005 PLAIN



MC-003- DK PLAIN




MC-006 PLAIN

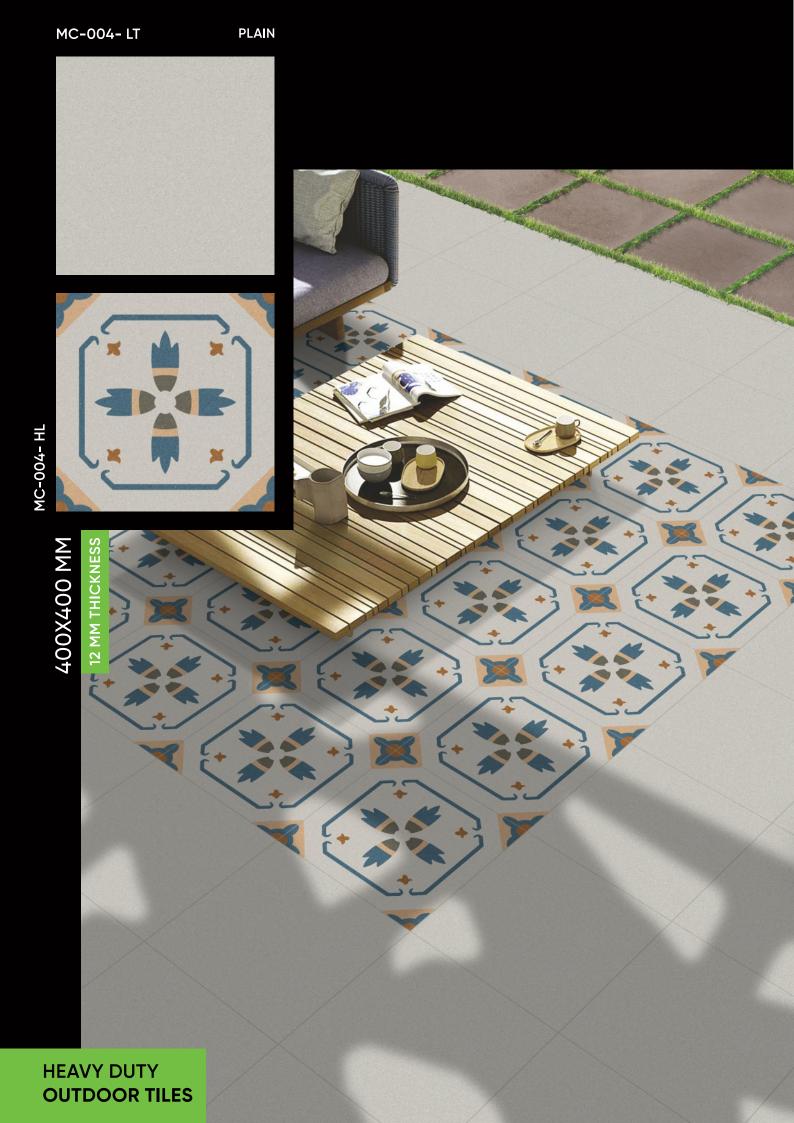

400X400 MM

12 MM THICKNESS



MC-007 PLAIN



MC-008 PLAIN




MC-009 PLAIN




MC-010 PLAIN

MOROCON SERIES 400X400 MM


12 MM THICKNESS







MC-012- HL PLAIN



MC-012- DK PLAIN



400X400 MM

12 MM THICKNESS







MC-015 **PLAIN**

400X400 MM

12 MM THICKNESS








MC-017 PLAIN







MC-020 PLAIN



400X400 MM

12 MM THICKNESS



MC-021 PLAIN



MC-022 PLAIN



MC-023 PLAIN



MC-024 PLAIN

400X400 MM

12 MM THICKNESS









MC-028 PLAIN


MC-029 PLAIN



400X400 MM

12 MM THICKNESS








MC-031 PLAIN



MC-032 PLAIN





MC-033 PLAIN

400X400 MM

12 MM THICKNESS








MC-036 PLAIN



MC-037 PLAIN



MC-038 PLAIN

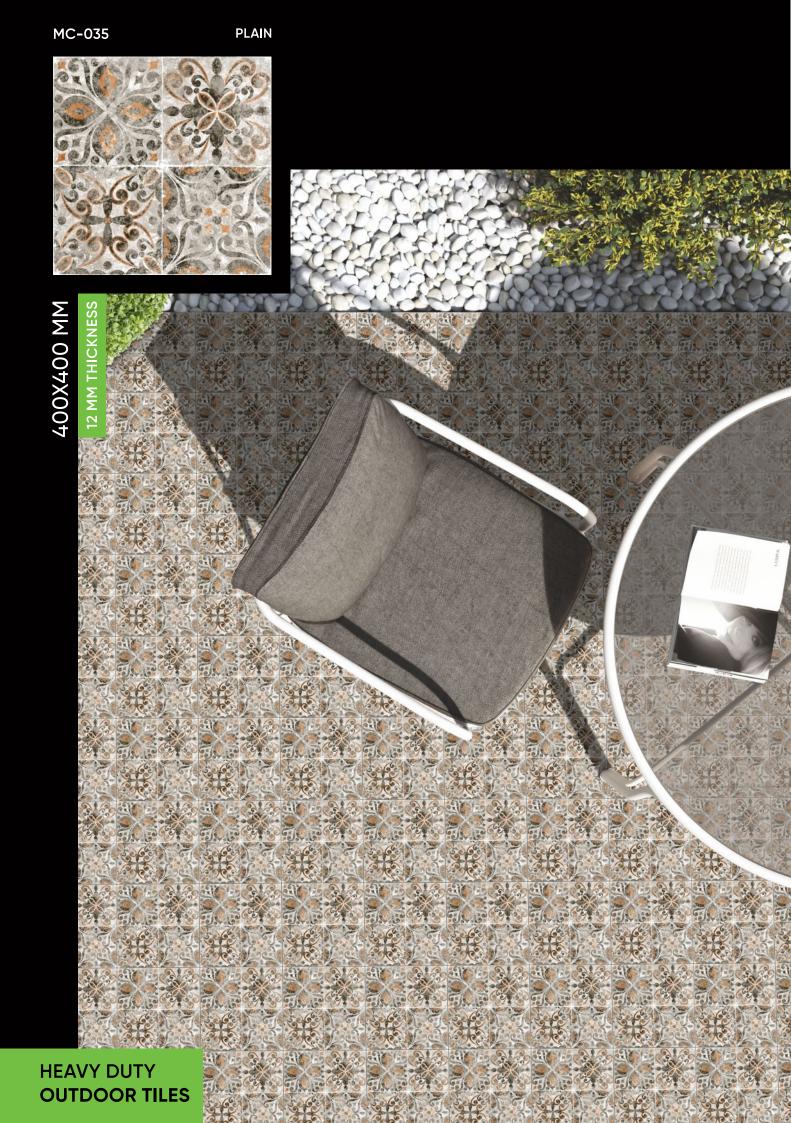

400X400 MM

12 MM THICKNESS



MC-039 PLAIN



MC-040 PLAIN



MC-041 PLAIN




MC-042 PLAIN


12 MM THICKNESS

400X400 MM











MC-044 PLAIN



MC-046 PLAIN

400X400 MM

12 MM THICKNESS




MC-047 PLAIN

TERRAZO SERIES

12 MM THICKNESS

An elegant style for your taste

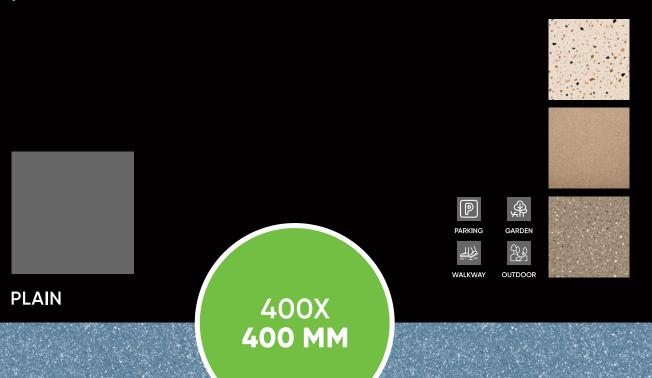

12 MM THICKNESS



12 MM THICKNESS



PLAIN

TERRAZO-010

PLAIN

HEAVY DUTY
OUTDOOR TILES

TERRAZO-009


12 MM THICKNESS



12 MM THICKNESS



12 MM THICKNESS






12 MM THICKNESS






12 MM THICKNESS



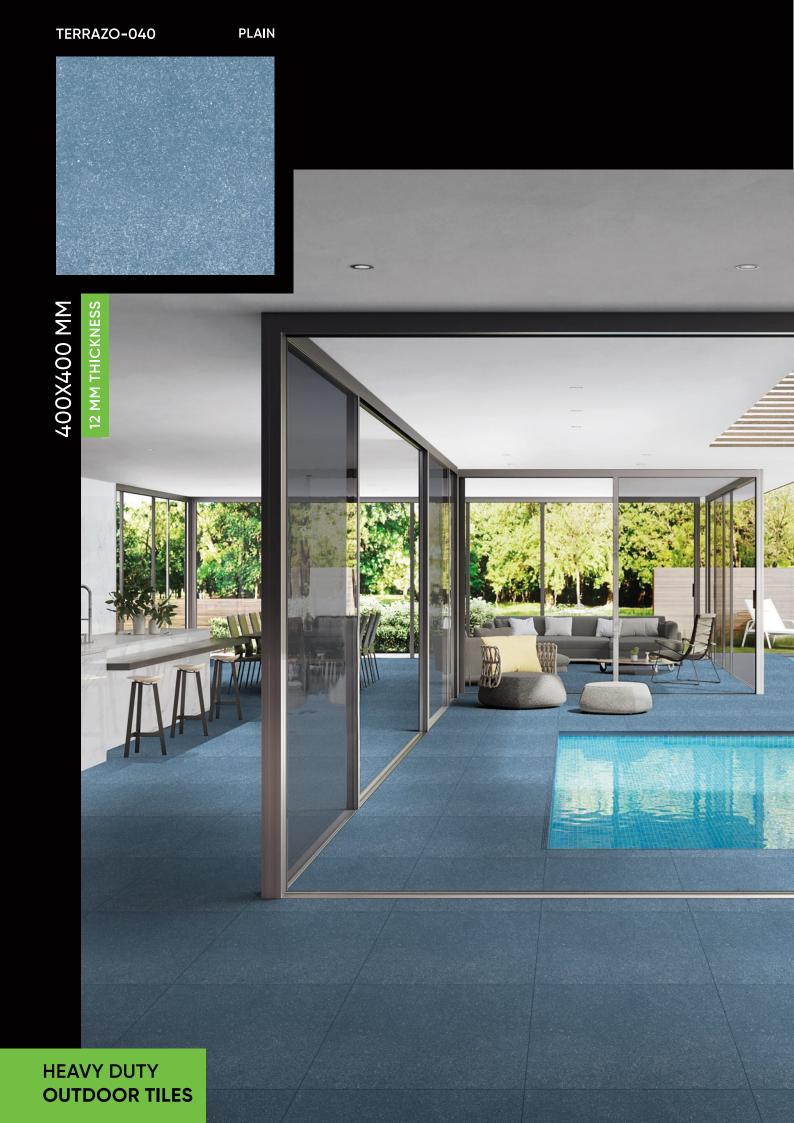



12 MM THICKNESS







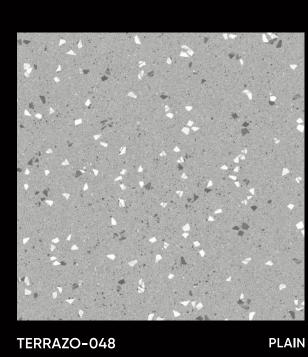



TERRAZO-047 PLAIN




12 MM THICKNESS



TERRAZO SERIES


400X400 MM

12 MM THICKNESS

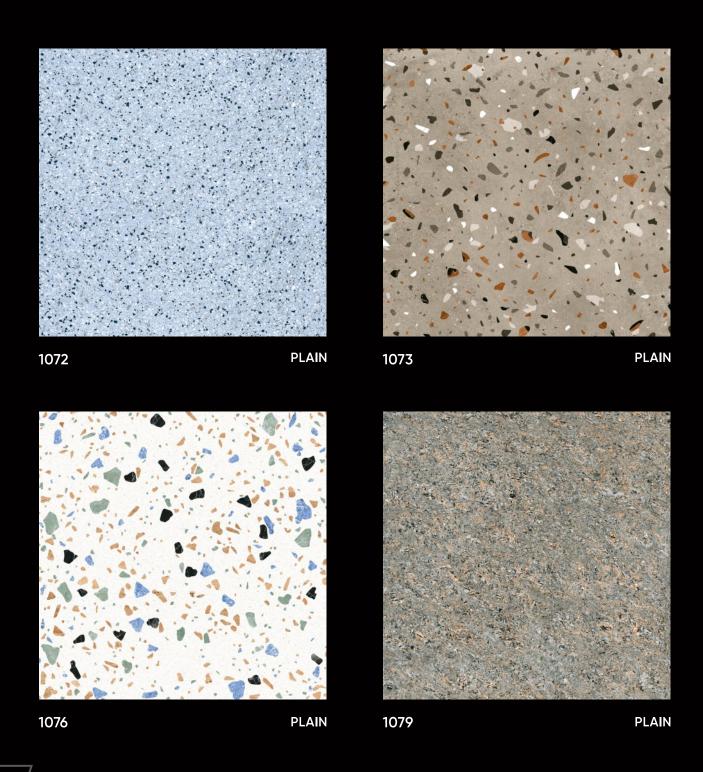

12 MM THICKNESS

An
elegant
style for
your taste

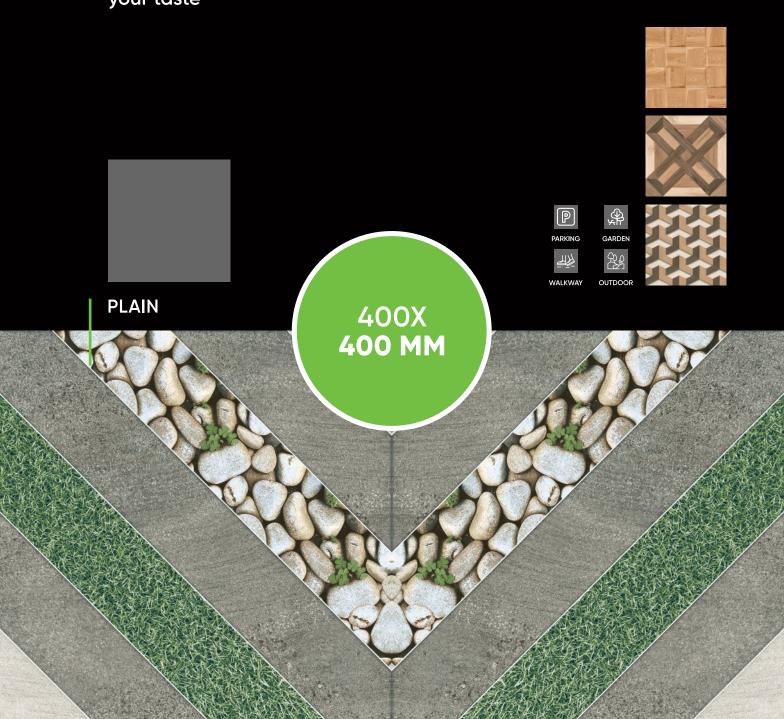


400X400 MM

12 MM THICKNESS







GS-001 PLAIN










GS-004 PLAIN

400X400 MM

12 MM THICKNESS








GS-006 PLAIN




GS-007 PLAIN

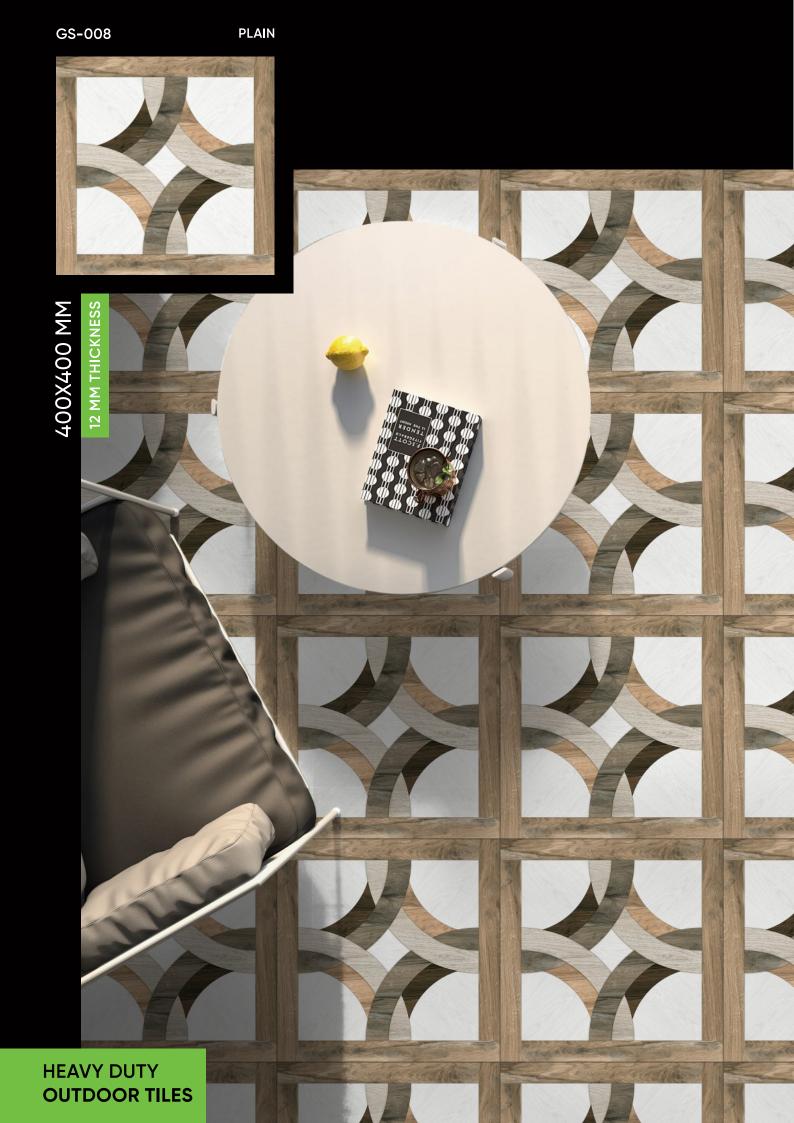


400X400 MM

12 MM THICKNESS







GS-010 PLAIN




GS-011 PLAIN



GS-012 PLAIN


400X400 MM

12 MM THICKNESS





GS-013 PLAIN








GS-016 PLAIN


GS-017 PLAIN

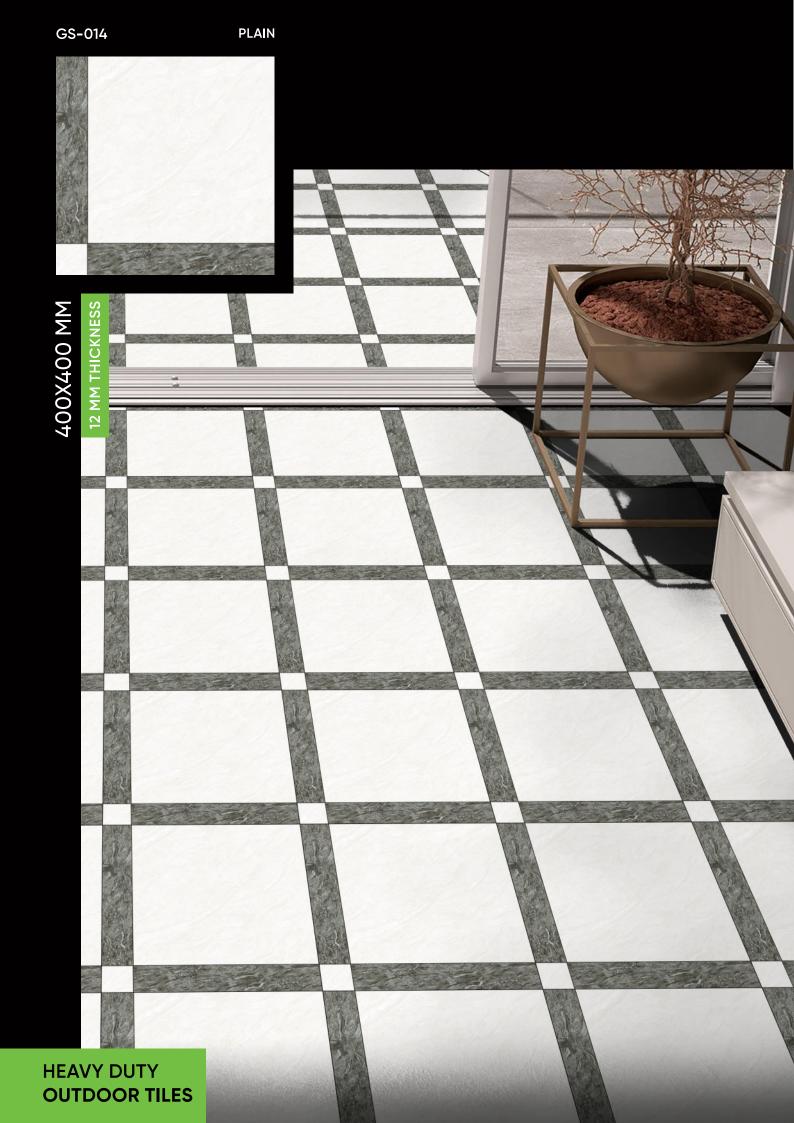

400X400 MM

12 MM THICKNESS








GS-019 PLAIN








GS-021 PLAIN


GS-022 PLAIN

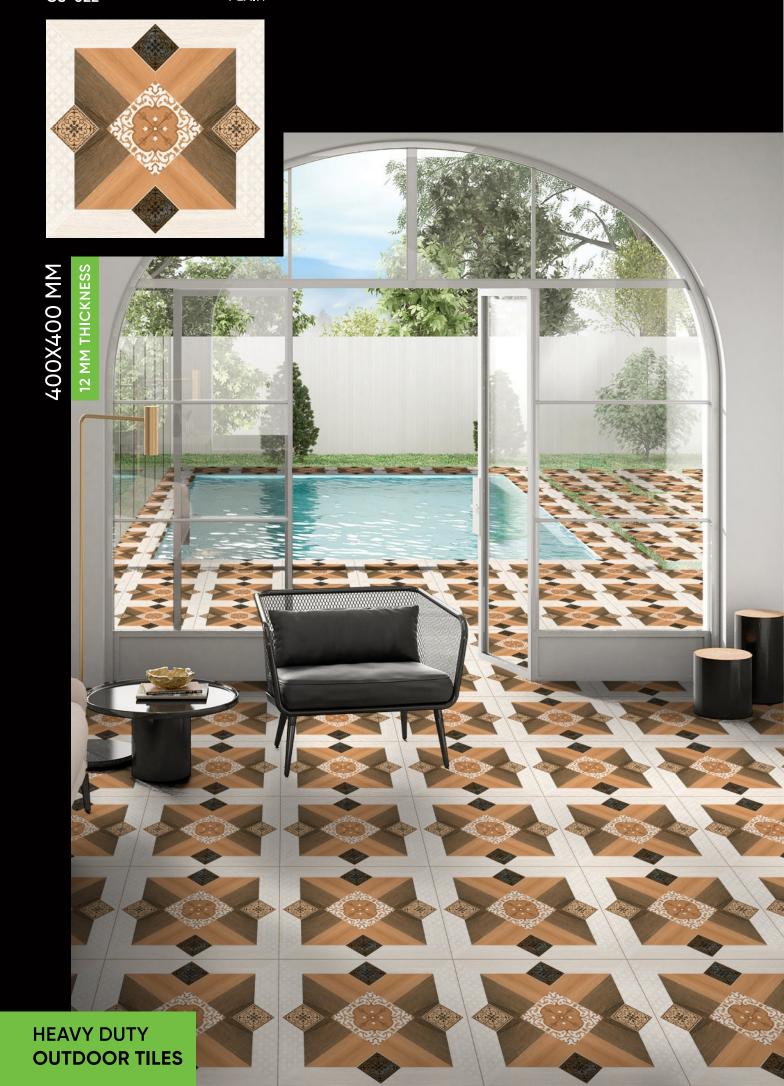

400X400 MM

12 MM THICKNESS







GS-024 PLAIN



GS-025 PLAIN



GS-026 PLAIN

GALICHA SERIES 400X400 MM

12 MM THICKNESS






400X400 MM

12 MM THICKNESS








GS-033 PLAIN









GS-035 PLAIN

400X400 MM

12 MM THICKNESS








GS-037 PLAIN








GS-039 PLAIN

WOOD SERIES

12 MM THICKNESS


An elegant style for your taste

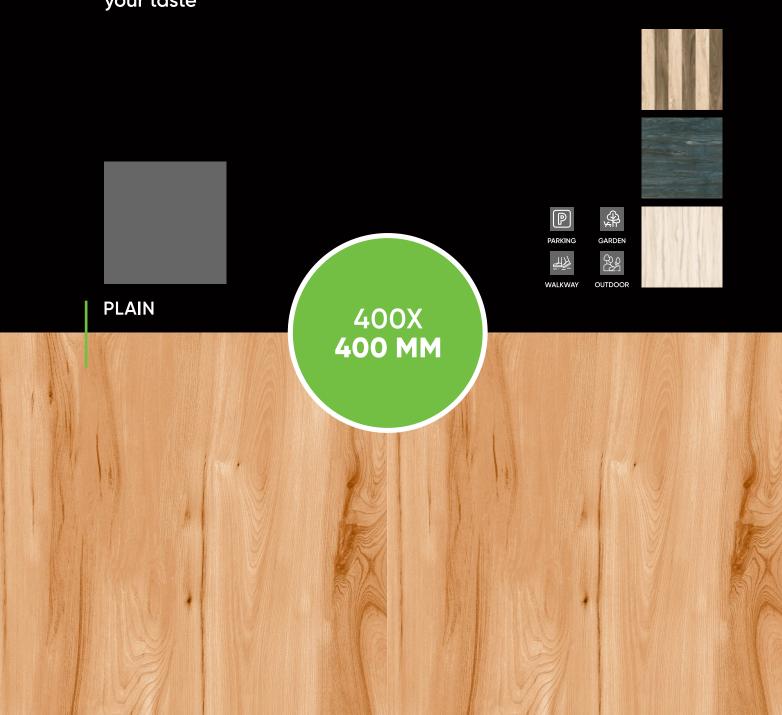

WOOD SERIES 400X400 MM

12 MM THICKNESS







WS-002- LT PLAIN



WS-001- DK PLAIN




WS-002- DK PLAIN

WOOD SERIES 400X400 MM

12 MM THICKNESS








WS-005- LT PLAIN



WS-003- DK PLAIN




WS-005- DK PLAIN

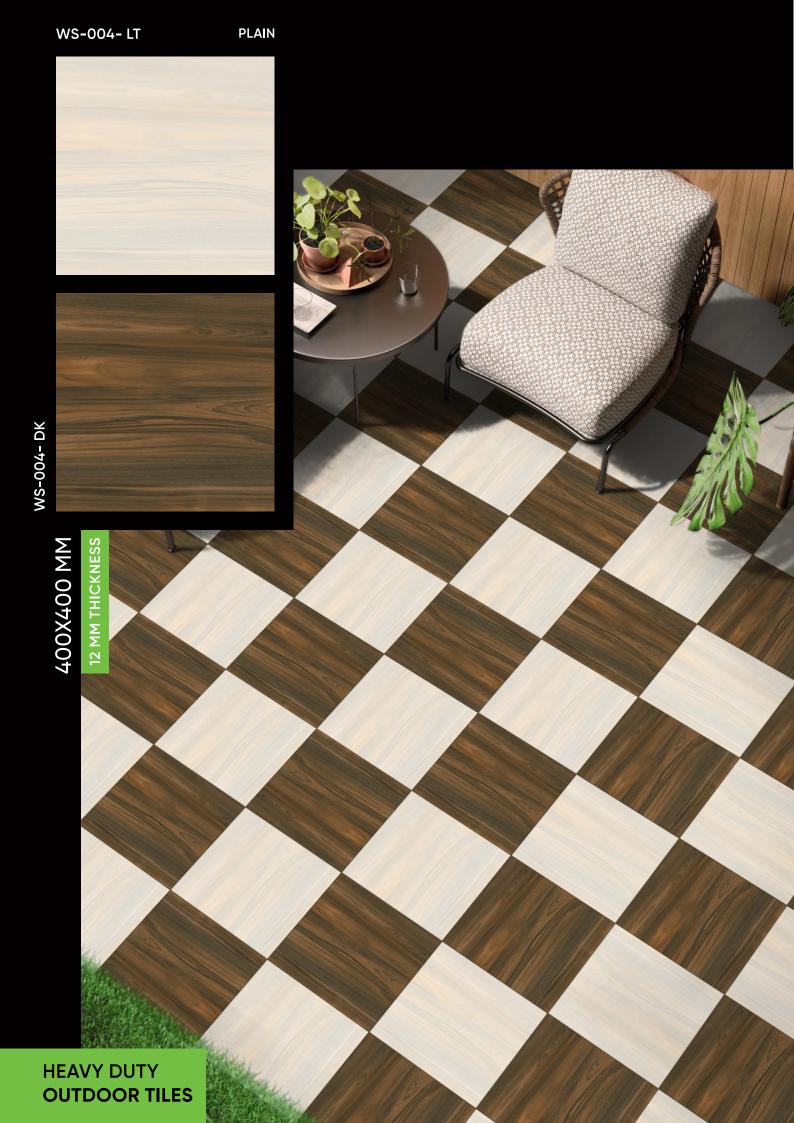

WOOD SERIES 400X400 MM

12 MM THICKNESS








WS-007- LT PLAIN








WS-007- DK PLAIN



WOOD SERIES 400X400 MM

12 MM THICKNESS







WS-009- DK PLAIN



WS-010- LT PLAIN




WS-010- DK PLAIN

WOOD SERIES 400X400 MM

12 MM THICKNESS







WS-011- DK PLAIN



WS-013- LT PLAIN




WS-013- DK PLAIN



WOOD SERIES 400X400 MM

12 MM THICKNESS







WS-015 PLAIN



WS-016 PLAIN




WS-018 PLAIN



WOOD SERIES
400X400 MM

12 MM THICKNESS



TECHNICAL SPECIFICATIONS

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP Bla	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF GVT / PGVT	TEST METHOD				
REGULATORY PROPERTIES								
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2				
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2				
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2				
Color dierence	Unaltered	No change	No change	ISO-10545-16				
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER				
STRUCTURAL PROPERTIES								
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3				
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082				
MASSIVE MECHANICAL PROPERTIES								
	Min. 35 N/mm	Min. 40 N/mm²	Min. 40 N/mm²	ISO-10545-4				
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4				
Impact resistance	As per mfg	Min. 0.55	Min. 0.55	ISO-10545-5				
SURFACE MECHANICAL PROPERTIES								
Surface abrasion resistance	As per mfg	Min. Class-3	Min. Class-4	ISO-10545-7				
MOH's hardness	As per mfg	Min. 4	Min. 5	EN 101				
THERMO HYDROMETRIC PROPERTIES								
Frost resistance	No damage	No damage	No damage	ISO-10545-12				
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9				
Moisture expansion	Nil	Nil	Nil	ISO-10545-10				
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8				
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11				
CHEMICAL PROPERTIES								
Chemical resistance	No damage	No damage	No damage	ISO-10545-13				
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14				
SAFETY PROPERTIES								
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17				
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.				
Lead & Cadmium given o by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15				

Packing Details

SR. NO.	SIZE (IN MM)	PACKING	COVERAGE AREA	Thickness	WEIGHT
1	400X400MM	5 PIS	0.80SQ.MTR./8.61 SQ.FT.	12MM	19 Kg Approx

Note: •Colour Shown are as accurate as the limitations of the printing process will allow. • Prospective customers are advised to inspect a sample of the tile before ordering. • Every effort has been made to ensure the accuracy of the information given. • However, the company reserve the right to change the specifications without prior notice. • Sometime variations in shade or size being inherent to ceramic industry may occur. • Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

Applications

























DISCLAIMER: We reserves the right to delete & amend either totally of partially, and of the colours, shapes, size, references and other technical specification contain in catalogue at any time, the colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample final selection. The details of colours, size, references should be vitrified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE SHALL ENTERTAINED ON TILES ALREADY LAID/FIXED.

